


Waveguide Circulator

Part No: VT260WCIC

1.0	Mechanical Specifications	
1.1	Waveguide type	WR34
1.2	Flange type	FBP260 (COVER)
1.3	Material	Aluminum
1.4	Inside finish	Chromate conversion
1.5	Dimension	L*W*H=22.3*27*21.2 mm
1.6	Temperature range	-40°C ~ +80°C
2.0	Electrical Specifications	
2.1	Frequency Range	25-27 GHz
2.2	VSWR (Max)	1.25
2.3	Insertion loss (Max)	0.4 dB
2.4	Isolation (Min)	20 dB
3.0	Outline Drawings	
 <p>The drawings show the mechanical layout of the circulator. The top view is a square with width 'W' and height 'H', featuring four mounting holes and a central rectangular component. The side view shows the profile of the device. The front view shows a circular feature within a square frame.</p>		

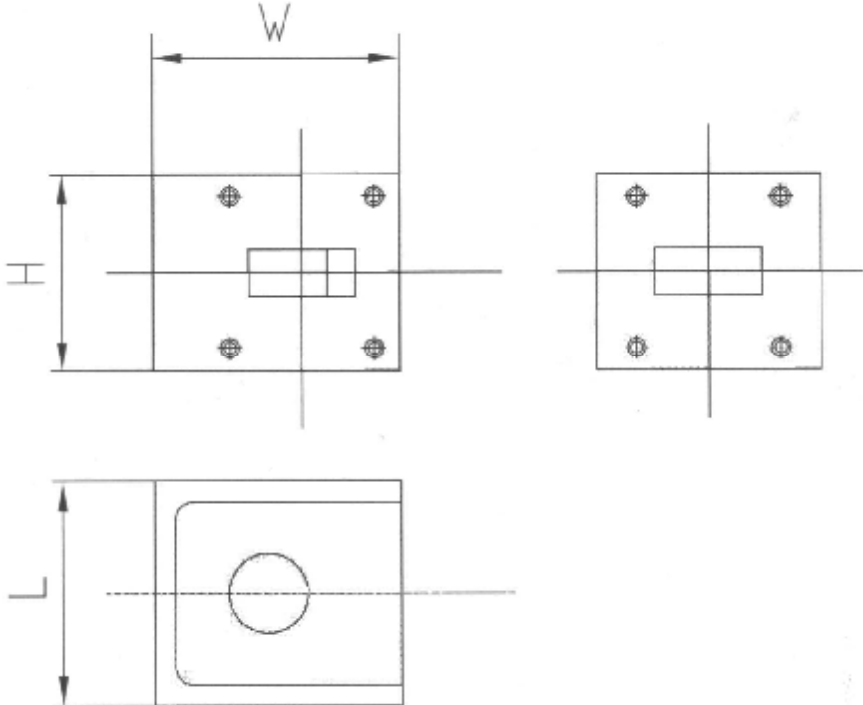

Revision History

Date	Revision	Changes
17-Mar-2007	1	First release

Information furnished is believed to be accurate and reliable. However, Vector Telecom assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Vector Telecom. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. Vector Telecom products are not authorized for use as critical components in life support devices or systems without express written approval of Vector Telecom.

The Vector Telecom logo is a registered trademark of Vector Telecom Pty Ltd.

© 2006 Vector Telecom Pty Ltd - All rights reserved

Email: sales@vectortele.com

www.vectortele.com

Vector Telecom Pty Ltd

Level 40, 140 William Street, Melbourne VIC 3000, Australia
Tel: +61 3 9607 8357 - Fax: +61 3 9607 8282 - www.vectortele.com